

Ex. in Dok.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D01D 5/08, A46B 1/00, 9/04	A1	(11) International Publication Number: WO 98/48086 (43) International Publication Date: 29 October 1998 (29.10.98)
---	----	---

(21) International Application Number: PCT/US97/06780

(22) International Filing Date: 24 April 1997 (24.04.97)

(71) Applicant: E.I. DU PONT DE NEMOURS & CO. [US/US];
1007 Market Street, Wilmington, DE 19898 (US).

(72) Inventor: RACKLEY, Robert, L.; 119 Canterbury Drive,
Parkersburg, WV 26104 (US).

(74) Agents: VASSIL, John, C. et al.; Morgan & Finnegan L.L.P.,
345 Park Avenue, New York, NY 10154 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,
GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ,
PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT,
UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD,
SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI,
FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD,
TG).


Published

With international search report.

(54) Title: MONOFILAMENTS WITH SPLIT ENDS

(57) Abstract

Monofilaments with split ends. The monofilaments can be used to form toothbrush bristles having flagged or feathered tips. Each of the monofilaments has a plurality of internal fusion lines and at least four voids, wherein the voids comprise between 5 and 20 % of the cross-sectional area of the monofilaments. Preferably, the monofilaments each have a diameter in a range of 0.0025 to 0.012 inches, and have a hexalocular or an octalocular configuration. The monofilaments are manufactured by extruding a plurality of thermoplastic polymeric streams, rotating a plurality of cutting blades above 1000 rpm, and placing a plurality of cutting blades in contact with end portions of the plurality of thermoplastic polymeric streams to form split ends.

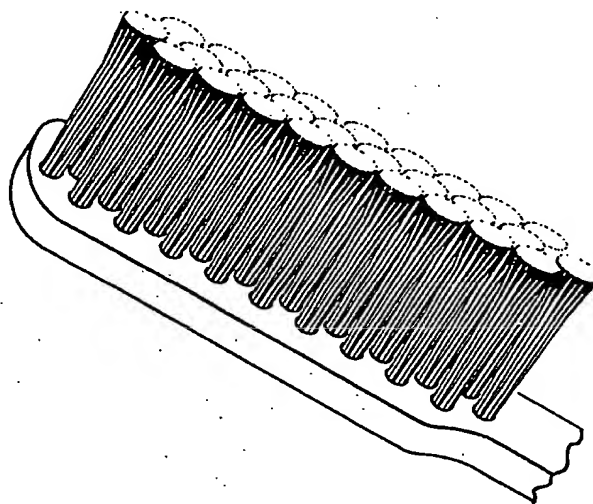

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

MONOFILAMENTS WITH SPLIT ENDSBACKGROUND OF THE INVENTION1. Field of the Invention

5 This invention relates generally to monofilaments, and more particularly to monofilaments having split ends, which may be used for example as toothbrush bristles.

2. Description of the Related Art

10 Thermoplastic polymers have long been used to form brush bristles in a wide variety of configurations. To increase the effectiveness of these brushes, the ends of such bristles have been split or "feathered" to provide a soft bristle tip. In the past, however, various difficulties have been encountered in
15 splitting bristle tips.

In particular, various techniques have been used to split paintbrush bristles to improve painting performance. Such procedures have been particularly suited to paintbrush bristles because long splits which propagate along a large
20 portion (up to one inch) are particularly desirable. With certain brushes, however, only splitting of the tips is desirable. For example, the length of a typical toothbrush bristle is about (or less than) one half inch. If splitting were to occur along a large portion of a toothbrush bristle, the bristles would not be sufficiently
25 rigid to adequately clean teeth. Accordingly, currently available splitting techniques fail to adequately address difficulties associated with splitting the tips of toothbrush bristles and other bristles in which long splits are undesirable.

SUMMARY OF THE INVENTION

30 This invention relates to a monofilament having a portion with a plurality of internal fusion lines and at least four voids, wherein the voids comprise between 5 and 20% of the cross-sectional area of the monofilament.

35 This invention also relates to a monofilament having a

- 2 -

diameter in a range of 0.0025 to 0.012 inches, wherein the monofilament has a hexalocular, an octalocular, or a near circular shape.

In addition, this invention relates to a method of manufacturing extruded monofilaments having split ends, including the steps of extruding a plurality of thermoplastic polymeric streams to form a plurality of monofilaments, spinning a plurality of cutting blades above 1000 rpm, and placing a plurality of cutting blades in contact with end portions of the monofilaments to form split ends. In one embodiment of the present invention, the blades are spun at or near the natural frequency of the monofilaments.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1a is a cross-sectional view of a hexalocular monofilament of the present invention.

Fig. 1b is a cross-sectional view of a spinnerette capillary used to extrude the monofilament of Fig 1a.

Fig. 2a is a cross-sectional view of another hexalocular monofilament of the present invention.

Fig. 2b is a cross-sectional view of a spinnerette capillary used to extrude the monofilament of Fig 2a.

Fig. 3a is a cross-sectional view of another hexalocular monofilament of the present invention.

Fig. 3b is a cross-sectional view of a spinnerette capillary used to extrude the monofilament of Fig 3a.

Fig. 4a is a cross-sectional view of another hexalocular monofilament of the present invention.

Fig. 4b is a cross-sectional view of a spinnerette capillary used to extrude the monofilament of Fig 4a.

Fig. 5a is a cross-sectional view of another hexalocular monofilament of the present invention.

Fig. 5b is a cross-sectional view of a spinnerette capillary used to

- 3 -

extrude the monofilament of Fig 5a.

Fig. 6a is a front view of a spinnerette having a plurality of spinnerette capillary locations.

Fig. 6b is a side view of the spinnerette of Fig. 6a.

Fig. 7a is a plan view of a blade used in manufacturing a monofilament having split ends.

Fig. 7b is a front view of a structure having three blades mounted on a common shaft for use in splitting the ends of the monofilaments of the present invention.

Fig. 7c is a side view of the structure of Figure 7b.

Fig. 8 is a graph of the natural frequency for a 612 monofilament with a 550,000 psi modulus and various lengths and diameters.

Fig. 9 is a perspective view of a toothbrush having a plurality of feathered bristles.

Fig. 10 is a side view of a plurality of bristles with split ends that produce a plurality of soft fine tips.

Fig. 11 is a side view of a comparison of a feathered toothbrush bristle which spreads-out on a tooth surface with an ordinary solid tip which provides only a single contact point.

Fig. 12 is a view of feathered toothbrush bristles which penetrate deeper at the gum line for better cleaning without hurting the gum of a patient.

Fig. 13 is a cross-sectional view of an octalocular monofilament in accordance with the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS OF THE PRESENT INVENTION

Which reference to the drawings, several embodiments of the present invention, and their corresponding method of manufacture, will now be described in greater detail. Which reference to Figs. 1a, 2a, 3a, 4a and 5a, examples of a monofilament having a hexalocular shape are shown. Such shapes were achieved

- 4 -

through an extrusion process using the respective spinnerette capillaries of Figs. 1b, 2b, 3b, 4b and 5b. Such monofilaments were prepared by the fusion of six polymer streams. Each of these monofilaments 10 include a plurality of voids 20 and a plurality of weld or fusion lines. The voids result in a void content of between 5 and 20% of the cross-sectional area of the monofilaments.

The brush bristle of the present invention can be prepared from a wide variety of thermoplastic polymeric materials including polyamides, polyesters and polyolefins.

Polyamides for use in brush manufacturing including nylon 6,6, nylon 610 (polyhexamethylene sebacamide), and nylon 612 (hexamethylene diamine). Polyesters which have been found particularly well suited to bristle manufacture include polybutylene terephthalate and polyethylene terephthalate. A polyolefin which has been found particularly well-suited to bristle manufacture is polypropylene.

The overall diameter, or overall maximum cross-sectional dimension, of the brush bristles of the present invention is in the range of 0.0025 to 0.012 inches (0.064 to 0.3 mm).

The bristles of the present invention are preferably formed by extruding six or more individual streams of polymeric material from a spinnerette including the spinnerette capillaries shown in Figs 1b, 2b, 3b, 4b, and 5b, and joining the streams to form a single filament. A spinnerette, such as the one shown in Figures 6a and 6b, includes a plurality of spinnerette capillaries. With reference to Figs. 1b, 2b, 3b, and 5b, in the extrusion of the thermoplastic polymer streams, the polymer is extruded through openings 40. The fusion of the streams results in fusion lines at the interface of the individual streams, and the formation of longitudinal voids along the fusion lines. The general configuration of the voids can vary widely.

After extrusion of the thermoplastic polymer streams at elevated temperatures into a single filament, the monofilament is quenched and then drawn as generally described, for example, in U.S. Pat. No. 2,418,492, herein incorporated by reference.

- 5 -

incorporated by reference.

After extrusion and quenching of the monofilament, the filament is oriented by stretching to improve the longitudinal strength. In addition, the filament can be subjected to other treatments to improve physical properties, such as treatment with saturated steam as described in U.S. patent No. 3,595,952, herein incorporated by reference.

The filament may be heat set after drawing for good bend recovery. The heat setting can be carried out either in a gas such as by blowing hot air over the filament, or a liquid bath such as by passing the filament through a bath of oil. The filaments are then cut into lengths suitable for brush manufacture. The individual bristles are then gathered into bundles, the bundles are tufted into brushes, and the brushes are tipped and flagged by a procedure described below.

With reference to Fig. 7a, a plan view of a cutting blade for use in splitting the ends of the bristle of the present invention is shown. An arrangement of three such blades which are separated by spacers on a common shaft by about 3/16 of an inch and which are approximately rotated from one another by 120 degrees is shown in Figs. 7b and 7c. It has been found that by rotating such a blade above 1000 rpm and placing such a blade in contact with the bristles achieves a fine feathering (splitting) effect. In one example of the present invention, the blades are rotated at 30,000 rpm with a router motor. The interference between the bristle and the blade is varied depending on the depth of the split desired, although it has been found that 1/8 to 1/4 of an inch is preferable. Essentially, by spinning the blades at a high rate of speed and placing the blades in contact with the bristle tips, a fast and violent bristle cutting action is achieved, thereby causing optimal bristle splitting.

It has also been found that by rotating the blades at or near the natural frequency of a monofilament will obtain optimal splitting of the bristles. The natural frequency of a uniform beam is

$$\text{Natural Frequency} = A \sqrt{\frac{EI}{ul^4}}$$

- 6 -

where $A=3.52$ for a cantilever beam;

$$I = \text{area moment of inertia} = \frac{\pi d^4}{64} ;$$

5 E is Young's Modulus of Elasticity; μ is mass per unit length; and l = length.
The natural frequency is usually stated in radians per second which can also be expressed in revolutions per minute by dividing by 2π and multiplying by 60 seconds per minute.

10 With reference to Fig. 8, a graph of the natural frequency for a 612 monofilament bristle with a 550,000 psi modulus and various lengths and diameters is shown.

15 The monofilament bristles of the present invention produce a larger number of smaller ends ("flags") than previously known monofilament bristles of the same diameter. The bristles exhibit excellent durability and cleanability, and are particularly useful as toothbrush bristles to produce remarkably soft, fine tips. By using such a technique, the bristles of the present invention are split rather than
20 end rounded to give a plurality of smaller ends that scrub the gingival area more effectively. It has also be found that the more dense area achieved by such flagged ends scrub major tooth areas better by keeping toothpaste in contact with the tooth surface as well as achieving a softer feel when contact is made with soft tissue in the mouth.

25 With reference to Fig. 9, a perspective view of a toothbrush having a plurality of feathered bristles is shown. With reference to Fig. 10, a plurality of bristles with split ends that produce a plurality of soft fine tips is also shown. These feathered filaments spread-out on tooth surfaces to provide a plurality of
30 contact points, unlike ordinary solid tips which provide only one contact point. A comparison of these plurality of contact points to the single contact point of a solid tip is shown in Fig. 11. The fine feathered filaments of the present invention also produce a greater and deeper penetration at the gum line for better cleaning without

- 7 -

hurting the gum line of a patient. Such deeper penetration at the gum line is shown in Fig. 12. Accordingly, these soft filament tips carry sweeping power action along with a beneficial interdental and gumline cleaning. In fact, it has been found that such feathered tips reach farther between teeth, provide better cleaning coverage than ordinary soft filament tips because of the increase in contact surfaces, and thus holds toothpaste in contact with teeth. Such an arrangement also provides a unique cushioning effect at the tips which adds extra softness to the brush. Such softness reduces bleeding of the gums during brushing. Moreover, such bristles have proven to be as hygienic as round filaments.

Although the present invention has been described with reference to a hexalocular bristle structure having six voids, it has also been found that an octalocular bristle structure (having eight voids) provides numerous beneficial effects. Such an octalocular bristle is shown in Figure 13. It is also to be understood that although six and eight streams have been used to achieve hexalocular and octalocular structures, respectively, a greater number of streams may be used to produce additional structures having a corresponding greater number of voids. The outer shape of such hexalocular, octalocular or other structures may be manufactured so as to have a circular or near circular shape. Such a near circular outer shape is shown in Figure 13.

The percentage of the cross-sectional area occupied by the voids in the monofilaments is determined by the size, location, symmetry and shape of the voids. It has been found that a certain level of hollow space (voids) will result in an optimal splitting of brushes having relatively short lengths, such as toothbrushes. The voids optimally result in a void content of between 5 and 20% of the cross-sectional area of the monofilaments. With such brushes, if the voids are too small, such as the voids disclosed in U.S. Patent No. 5,128,208, any feathering effect would result in broken bristle ends rather than in achieving feathering. If the voids are too large, such as the voids disclosed in U.S. Patent No. 4,279,053, the bristle would feather easily, but the splits would likely propagate down the bristle during use. With use as a toothbrush bristle, it is

- 8 -

important that the tips of the bristles be split without the split propagating down the filament, either during manufacture or use by a patient. This may also be true of other types of brushes, depending on the particular use of the brush and/or length of the bristles.

With regard to the location of the voids within the monofilament, the voids should be located about 1/2 way between the center and the outside edge. It has also been found that a longer and slender void achieves a greater flagging effect than a rounded void.

It is also to be noted that the voids may be either symmetrical or asymmetrical, although it is to be noted that an asymmetrical void may have a natural curvature which is often undesirable in particular uses, such as a toothbrush. Preferably, openings 40 of the spinnerette capillaries, as shown in Figs. 1b, 2b, 3b, have a radius of curvature r in the range of 5 to 12 mils. Openings 40 of the spinnerette capillary of Fig. 2b have an internal radius (or radius of curvature) of 9 mils, while the openings of the spinnerette capillary of Fig. 3b have a radius of 8 mils. Interestingly, use of the spinnerette capillary of Figure 2b results in the asymmetrical monofilament of Fig. 2a, while use of the spinnerette capillary of Fig. 3b results in the symmetrical monofilament of Fig. 3a. It is important to note that the asymmetrical monofilament of Fig. 2a is not due to problems in the symmetry of the design, but with the large size of the lobes. With large lobes, the streams are not knitted together as the center is pulled. As such, insufficient space is left for two of the streams to be pulled into the monofilament.

The void content is determined on the basis of the weight of the hollow bristle and the weight of a hypothetical solid bristle of the same exterior configuration, according to the following formula:

$$\% \text{ Void Content} = 100 \left(1 - \frac{\text{weight of hollow bristle}}{\text{weight of solid bristle}} \right)$$

Although the present invention has been described in terms of certain

- 9 -

° preferred embodiments, other embodiments that are apparent to those of ordinary skill in the art are also intended to be within the scope of the present invention. Accordingly, the scope of the present invention is intended to be limited only by the claim appended hereto.

5

10

15

20

25

30

35

- 10 -

What is claimed is:

1. A brush monofilament having a portion with a plurality of internal fusion lines and at least four voids, wherein said voids occupy between 5 and 20% of a cross-sectional area of the monofilament.
2. The brush monofilament of claim 1 wherein said monofilament is a toothbrush bristle.
3. The brush monofilament of claim 1 wherein said monofilament is made of a thermoplastic polymeric material.
4. The brush monofilament of claim 3 wherein said thermoplastic polymeric material is selected from the group consisting of nylon 610, nylon 612, a polyamide, and polybutylene terephthalate.
5. The brush monofilament of claim 1 wherein said brush monofilament has six voids.
6. The brush monofilament of claim 1 wherein said brush monofilament has eight voids.
7. The brush monofilament of claim 1 wherein said brush monofilament has a near circular outer shape.
8. The brush monofilament of claim 1 wherein said brush monofilament has an outer diameter in a range of 0.0025 to 0.012 inches.
9. The brush monofilament having a diameter in a range of 0.0025 to

- 11 -

0.012 inches, said monofilament having a hexalocular, an octalocular, or a near circular shape.

10. The brush monofilament of claim 9 wherein said brush monofilament is a toothbrush bristle.

11. The brush monofilament of claim 9 wherein said brush monofilament is made of a thermoplastic polymeric material.

12. The brush monofilament of claim 9 wherein said thermoplastic polymeric material is selected from the group consisting of nylon 610, nylon 612, a polyamide, and polybutylene terephthalate.

13. The brush monofilament of claim 9 further comprising a portion with a plurality of internal fusion lines and at least four voids, wherein said voids occupy between 5 and 20% of a cross-sectional area of the monofilament.

14. A method of manufacturing extruded brush monofilaments having split ends, comprising:
extruding a plurality of thermoplastic streams to form a plurality of brush monofilaments;
rotating a plurality of cutting blades above 1000 rpm; and
placing the plurality of cutting blades in contact with end portions of the brush monofilaments to form split ends.

15. The method of claim 14 wherein said extruding comprises extruding said thermoplastic polymeric streams through a spinnerette.

16. The method of claim 14 wherein said extruding comprises extruding said thermoplastic polymeric streams through a spinnerette having a plurality of

- 12 -

spinnerette capillaries, each of said spinnerette capillaries having a plurality of openings with a curved portion having a radius of curvature in the range of 5 to 12 mils.

5 17. The method of claim 14 wherein said extruding comprises extruding a plurality of thermoplastic polymeric streams to form hexalocular or octalocular brush monofilaments.

10 18. The method of claim 14 wherein said spinning occurs at or about a natural frequency of said extruded brush monofilaments.

15 19. The method of claim 14 wherein said end portions are less than 1/4 of an inch in length.

20 20. The method of claim 14 wherein said plurality of cutting blades are placed in contact only with the end portions of the brush monofilaments so that each of said brush monofilaments has an unsplit portion and a split portion.

21. The method of claim 20 wherein said end portions are less than 1/4 of an inch in length.

25 22. A toothbrush comprising a plurality of bristles having feathered end portions and unfeathered stem portions, said unfeathered stem portions having a hexalocular or an octalocular configuration.

30 23. The toothbrush of claim 22 wherein said unfeathered stem portions have a plurality of internal fusion lines and at least four voids, wherein said voids occupy between 5 and 20% of a cross-sectional area of the bristles.

35 24. The toothbrush of claim 22 wherein said plurality of bristles are

- 13 -

brush monofilaments.

25. The toothbrush of claim 22 wherein said plurality of bristles are made of a thermoplastic polymeric material.

5

26. The toothbrush of claim 22 wherein said thermoplastic polymeric material is selected from the group consisting of nylon 610, nylon 612, a polyamide, and polybutylene terephthalate.

10

27. The toothbrush of claim 22 wherein each of said unfeathered stem portions have an outer diameter in a range of 0.0025 to 0.012 inches.

15

28. The toothbrush of claim 22 wherein each of said feathered portions is less than 1/4 of an inch in length.

29. A spinnerette for use in coextruding brush monofilaments, said spinnerette containing a plurality of spinnerette capillaries, each of said spinnerette capillaries having at least six holes for receiving at least six filament streams.

20

30. The spinnerette of claim 29 wherein each of said at least six holes have a curved portion with a radius of curvature in the range of 5 to 12 mils.

25

31. The spinnerette of claim 29 wherein said spinnerette capillaries are configured to extrude brush monofilaments having a hexalocular or an octalocular configuration.

30

35

1/7

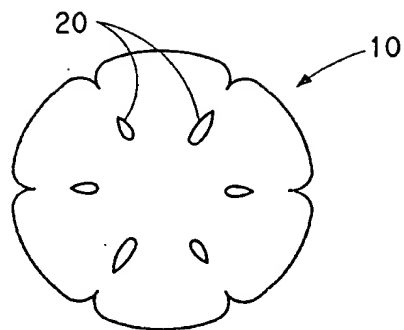


FIG. 1A




FIG. 1B

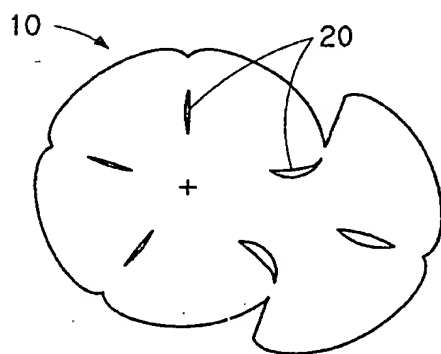


FIG. 2A

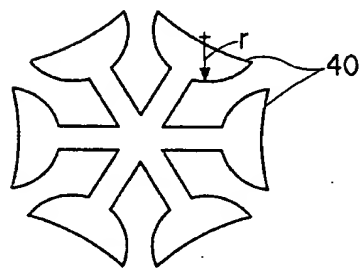


FIG. 2B

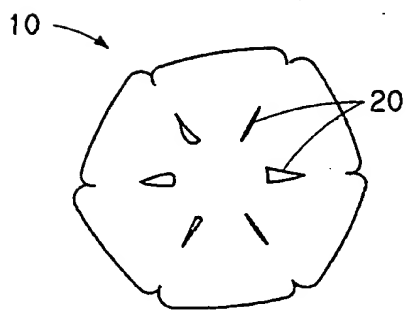


FIG. 3A

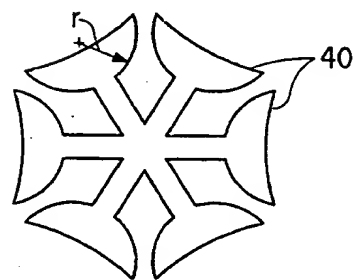


FIG. 3B

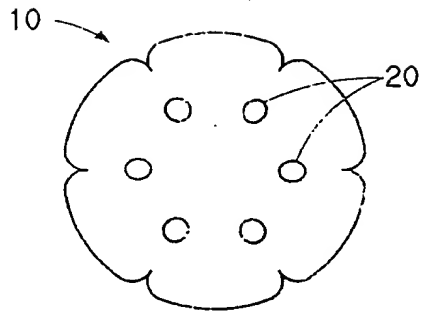


FIG. 4A

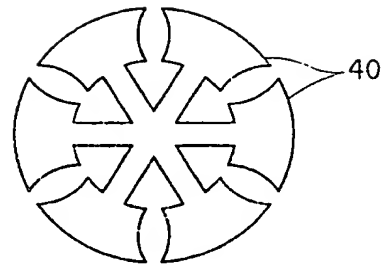


FIG. 4B

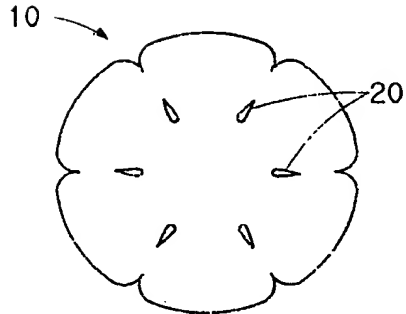


FIG. 5A

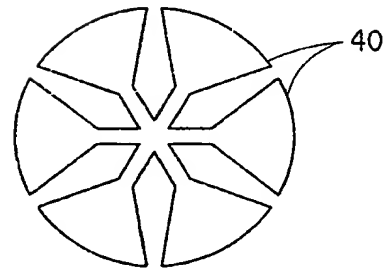


FIG. 5B

3/7

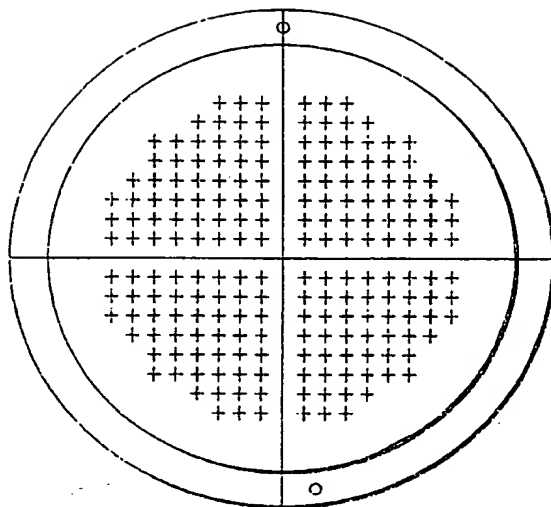


FIG. 6A




FIG. 6B

4/7

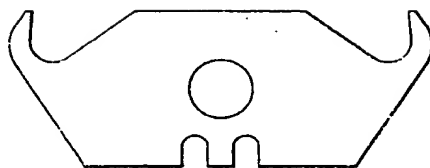


FIG. 7A

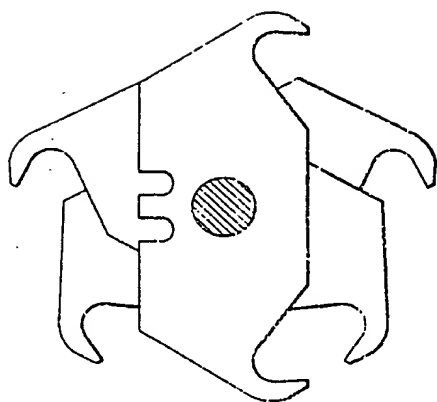


FIG. 7B

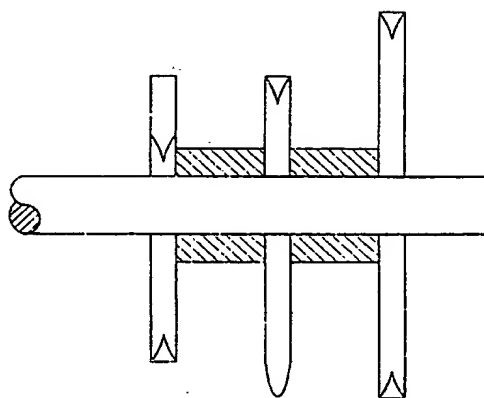


FIG. 7C

5/7

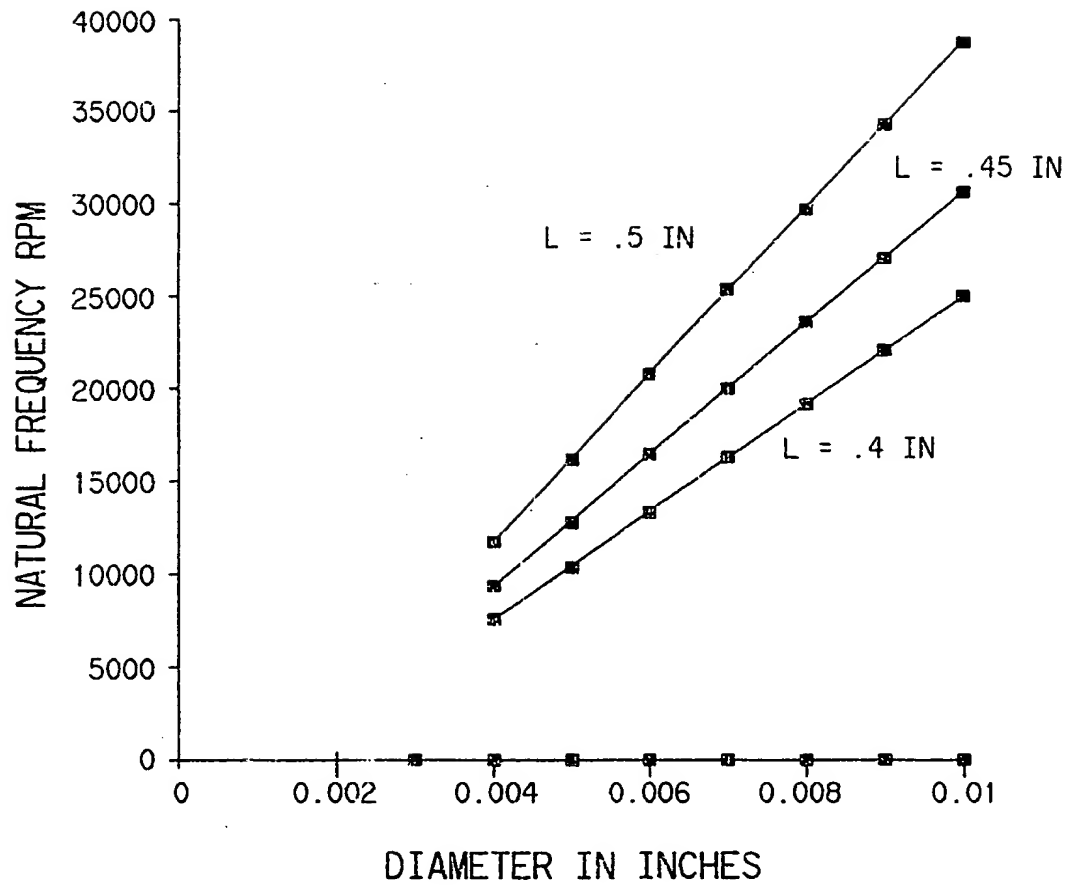


FIG.8

SUBSTITUTE SHEET (RULE 26)

6/7

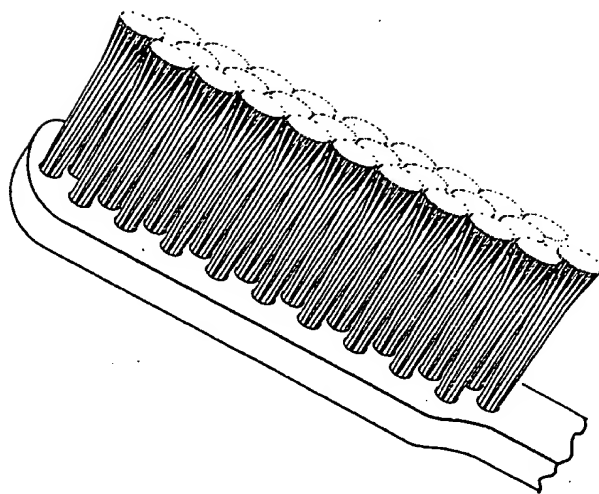


FIG. 9



FIG. 10

7/7

FIG. 11

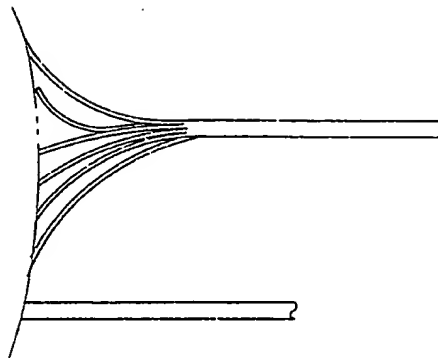


FIG. 12


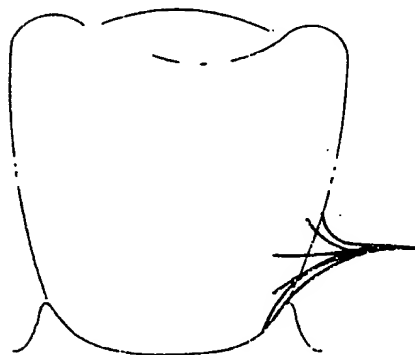


FIG. 13



INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/06780

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 D01D5/08 A46B1/00 A46B9/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D01D A46B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 128 208 A (BOND WILLIAM B ET AL) 7 July 1992 cited in the application see column 2, line 10 - line 20 see column 2, line 42 - line 64 see column 3, line 46 - line 47 see column 4, line 4 - line 10; figures 1,2	1,3,4,7, 8,13, 22-27
X	---	9,11,12, 14-16,20
Y	EP 0 450 210 A (NEWELL OPERATING CO) 9 October 1991 see abstract see page 4, line 13 - line 19; figures 1,4,5 ---	1,3,4,7, 8,13,23
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

12 January 1998

Date of mailing of the international search report

23.01.98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Westermayer, W

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 97/06780

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 44 42 001 A (HAHN RAINER) 5 June 1996 see claims 1-3 ---	22-27
X	US 4 279 053 A (PAYNE ROBERT H ET AL) 21 July 1981 cited in the application see column 3, line 31 - line 44; figures 2,3 -----	29-31

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/06780

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5128208 A	07-07-92	WO 9210114 A	25-06-92
EP 0450210 A	09-10-91	US 5032456 A	16-07-91
		CA 1323740 A	02-11-93
DE 4442001 A	05-06-96	AU 4257296 A	19-06-96
		WO 9616573 A	06-06-96
		EP 0794714 A	17-09-97
US 4279053 A	21-07-81	AR 222571 A	29-05-81
		AU 533805 B	08-12-83
		AU 6267780 A	09-04-81
		BE 885337 A	23-03-81
		BR 8005986 A	31-03-81
		CA 1137269 A	14-12-82
		CH 646593 A	14-12-84
		DE 3035860 A	02-04-81
		FR 2465803 A	27-03-81
		GB 2060477 A,B	07-05-81
		JP 1006762 B	06-02-89
		JP 1523187 C	12-10-89
		JP 56054806 A	15-05-81
		NL 8005296 A,B,	26-03-81
		SE 450455 B	29-06-87
		SE 8006645 A	25-03-81
		ZA 8005879 A	28-04-82